



## TX2400-TB-300 Product Data Sheet

**2.45GHz    Copper Rod Sucker Antenna**  
**SMA-J Connector**



## I. Product Introduction



TX2400-TB-300 is a 2.45GHz copper rod sucker antenna. Height of the antenna is 90mm with a SMA-J connector (SMA inner screw thread and inner needle). The antenna is made of pure copper with a strong magnetic base, which can stick tightly to the metal surface. it can be applied to such broadband communication system, WiFi and mobile terminal equipment with frequency of 2.45GHz as AP, router, radio station, WiFi, smart TV and so on.

## II. Specification and Parameters

Physical Parameters	
Frequency	2.45GHz
Bandwidth	2.4-2.5GHz
Gain	6dBi
SWR	$\leq 1.5$
Polarization	Vertical
Radiation Direction	Omnidirectional
Input Impedance	50 $\Omega$
Power Capacity	50W
Other Parameters	
Height	90mm
Material	Copper
Sucker Diameter	$\Phi 62.2\text{mm}$
Total Weight	241g
Feeder Material	RG58
Feeder Length	3m
Connector	SMA-J (SMA inner screw thread and inner needle)
Working Temperature	-40°C ~ +85°C
Storage Temperature	-40°C ~ +85°C



### III. Testing

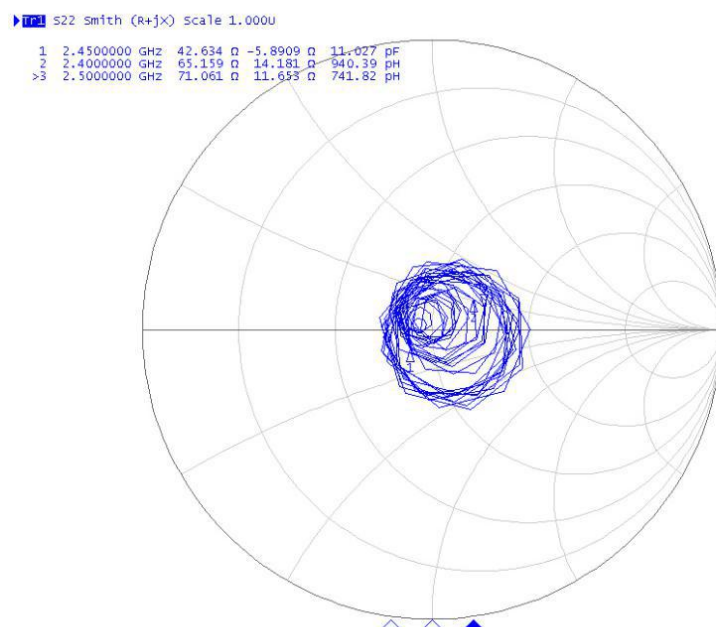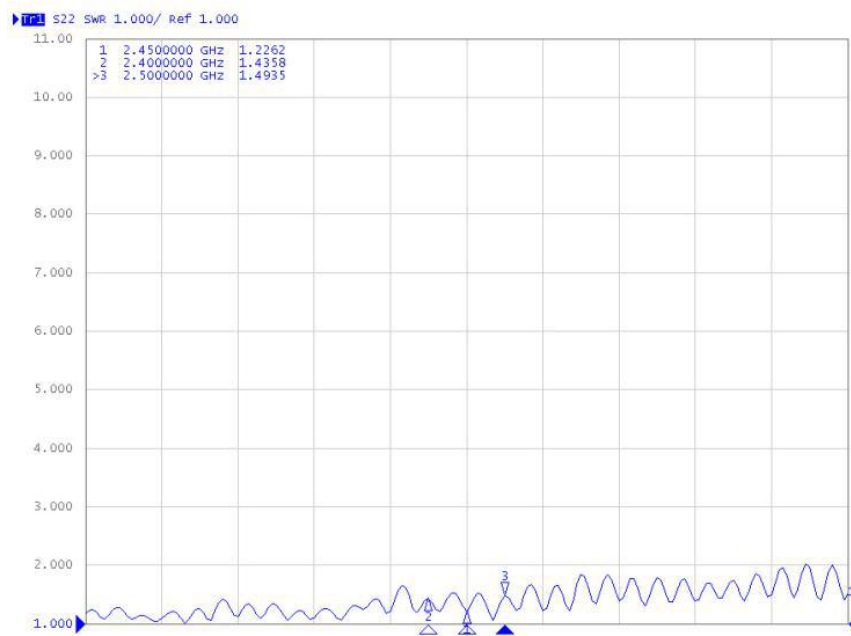

## IV. FAQ

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher place;
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

## About us

Technical support: [support@cdebyte.com](mailto:support@cdebyte.com)

Documents and RF Setting download link: [www.ebyte.com](http://www.ebyte.com)

Thank you for using Ebyte products! Please contact us with any questions or suggestions: [info@cdebyte.com](mailto:info@cdebyte.com)

-----  
Fax: 028-64146160 ext. 821

Web: [www.ebyte.com](http://www.ebyte.com)

Address: Innovation Center D347, 4# XI-XIN Road, Chengdu, Sichuan, China

